



# DOSAPLUS <sup>[new]</sup>

THE EVOLUTION  
CONTINUES!



THE RANGE  
IS ENHANCED  
WITH NEW MODELS  
AND VARIANTS

**DESCALING DOSING  
SYSTEM FOR ALL NEEDS!**



# DISCOVER THE NEW MODELS...



**21 2P FF**

## DOSAPLUS 21 2P FF DOSAPLUS 22 3P FF

- Brass head
- Rotational female brass unit
- Adjustment screw for correct dosing
- DOSAPLUS 21 - 2 piece (head, cup)
- DOSAPLUS 22 - 3 piece (head, ring, cup)

### SPECIFICATIONS

Non-toxic materials, suitable for drinking water.  
 Head Dosapulus 21: CW 602 N brass.  
 Head and ring nut Dosapulus 22: CW 602 N brass.  
 Bowl: SAN.  
 O-ring: EPDM.  
 Breather-valve: body stainless steel, o-ring EPDM.  
 Bellow: rubber (NBR).  
 IN/OUT threads: CW 614 N brass, 1/2" BSP



**22 3P FF**




**23 FF** bypass

## DOSAPLUS 23 FF with bypass DOSAPLUS 24 FF

- Plastic head -
- Rotational female brass unit -
- 2 pieces (head, cup) -
- Dosapulus 23 with by-pass -
- to facilitate maintenance operations

### SPECIFICATIONS

Non-toxic materials, suitable for drinking water.  
 Head: reinforced polypropylene.  
 Brass rotational connection group:  
 CW 602 N brass.  
 Bowl: SAN.  
 O-ring: EPDM.  
 Breather-valve: body stainless steel, o-ring EPDM.  
 Bellow: rubber (NBR).  
 IN/OUT threads: CW 614 N brass, 1/2" BSP

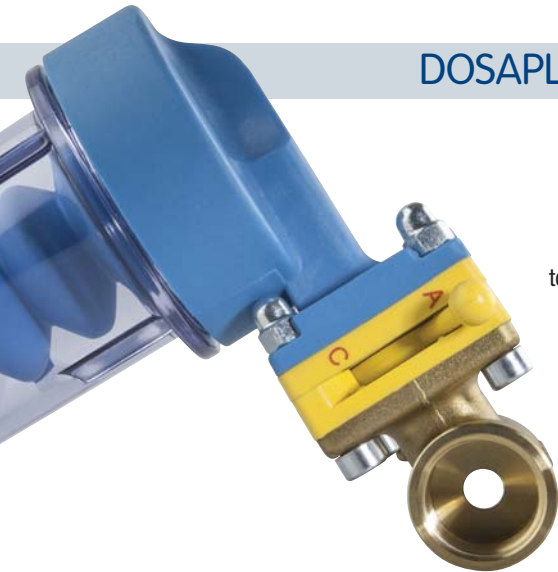

**24 FF**



**1 2P DG**

## DOSAPLUS 1 2P DG

- Brass head
- Rotational female brass unit with rotating nuts
- Adjustment screw for correct dosing
- 2 pieces (head, cup)

### SPECIFICATIONS

Non-toxic materials, suitable for drinking water.  
 Head: CW 602 N brass.  
 Bowl: SAN.  
 O-ring: EPDM.  
 Breather-valve: body stainless steel, o-ring EPDM.  
 Bellow: rubber (NBR).  
 IN/OUT threads: CW 614 N brass, 1/2" BSP



ALWAYS  
~~IMPOSSIBLE~~  
 INSTALLATIONS!

**DOSAPLUS 21 TA 2P FF**  
**DOSAPLUS 1 TA 2P DG**

The new elongated head Dosaplus (DIMA version) are the ultimate solution for more difficult applications. They facilitate installation and maintenance even in tighter spaces.

**MAXIMUM VERSATILITY**  
**SERVICING THE INSTALLER.**

- Brass head
- Rotational female brass unit with rotating nuts (DOSAPLUS 1 TA)
- Rotational female brass unit (DOSAPLUS 21 TA)
- Adjustment screw for correct dosing
- 2 pieces (head, cup)

**SPECIFICATIONS**

Non-toxic materials, suitable for drinking water.  
 Head: CW 602 N brass.  
 Bowl: SAN.  
 O-ring: EPDM.  
 Breather-valve: body stainless steel, o-ring EPDM.  
 Bellow: rubber (NBR).  
 IN/OUT threads: CW 614 N brass, 1/2" BSP



**21 TA 2P FF**



**1 TA 2P DG**

**ACCESSORIES INCLUDED**



spanner for Dosaplus 3P

spanner for Dosaplus 2P

**REFILL INCLUDED**



2 Poliphos A charge for Dosaplus

**WORKING CONDITIONS**

Max working pressure	8 bar (116 psi)
Max working temperature	45°C (113°F)
Min working temperature	4°C (39,2°F)
Max total hardness	35°f (350 ppm CaCO <sub>3</sub> )

**Remark** - the treated water can be heated up to 75°C - 80°C, above that temperature the polyphosphate loses gradually its effectiveness.

