



BG sidge

10"/20"



Container with

STRONG ACID CATION EXCHANGE RESIN




IT'S MADE IN ITALY



4.5" OD container with strong acid cation exchange resin for DP BIG housings

Plastic container filled with strong acid cation exchange resin for the reduction of total hardness (TH), providing water softening with removal of Calcium and Magnesium. QA CF BIG cartridges are available in 10" and 20" height.



— MAX WORKING TEMPERATURE

45°C (113°F)

MIN WORKING TEMPERATURE

4°C (39,2°F)



COLDWATER

Water softening.

Media life-span: see the graph.

Maintenance: none.

Remark - Use a pre-filter to protect the cartridge. Check the exhaustion of the resin using the specific Atlas Filtri EASY TEST strips.

Treatment material: strong acid cation exchange resin. Max concentration Cl: 0,1 ppm Max concentration Fe: 0,1 ppm

CONTAINER - TECHNICAL SPECIFICATIONS


Selected raw materials, suitable for drinking water.

Endcaps: Polypropylene


Container: PET

Flat seal: SEBS with antimicrobial technology

Grid: Polypropylene Felt pad: Polyester

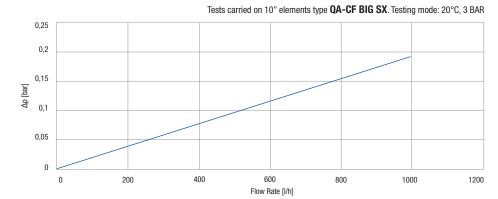





QA CF BIG SX

PART	MODEL	NOMINAL	RECOMMENDED	DIMENSIONS mm		
NUMBER	(OD 4.50" x ID 1.10")	HEIGHT	FLOW RATE I/h			
RA5205625	QA CF 10 BIG SX TS	10"	110	250	120	28
RA5207625	QA CF 20 BIG SX TS	20"	200	508	120	28







QA CF BIG cartridges are tested and certified under the most stringent procedures worldwide, in compliance with the sanitary certifications DM25 -ttaly- and EAC/Ghostreghistrazia -Russia- (complete cartridge) and ACS -France- (only empty container).

Resin is certified NSF 44 and 61, in compliance with DM 174/2004.



P 10 BIG SX TS, P 10 BIG SX AB, P 10 BIG SX BW, P 20 BIG SX TS, P 20 BIG SX AB and P 20 BIG SX BW empty containers are certified by IAPMO R&T against NSF/ANSI Standards 42, 61, 372 and CSA B483.1 for material safety and lead free requirements.




REFILL AVAILABLE (1 refill = 10" - 2 refills = 20"):

RA5209625 STRONG ACID CATION EXCHANGE RESIN

SPARE PARTS KIT AVAILABLE:

LB7707175







ATLAS FILTRI S.r.I. | Via Pierobon, 32 | 35010 Limena (PD) Italy Tel. +39.049.76.90.55 | Fax +39.049.76.99.94 | **www.atlasfiltri.com**